

# MICROPlumb® PRODUCTS Retrofit Flushometer Assemblies

# MCR 277 4.5-MOD



## ► Description

Concealed electronic operated water closet Flushometer for retrofit of manual, handle-operated Flushometer.

## ► Model Number/Flush Cycle


Model MCR-277-4.5-MOD Low Consumption (4.5 gpf/17.0 Lpf)

## ► Specifications

- Concealed electronic operated, diaphragm type, rough brass closet Flushometer
- 24 VAC 50/60 Hz solenoid operator
- 15' cord w/RJ-11 connection
- Solenoid operator is reversible (can be located right or left of water supply)
- Dual filtered Permex® bypass diaphragm
- V-651-A Vac. Breaker repair kit
- S-21 Gasket

## ► Variations

- AG Ground Joint Connection

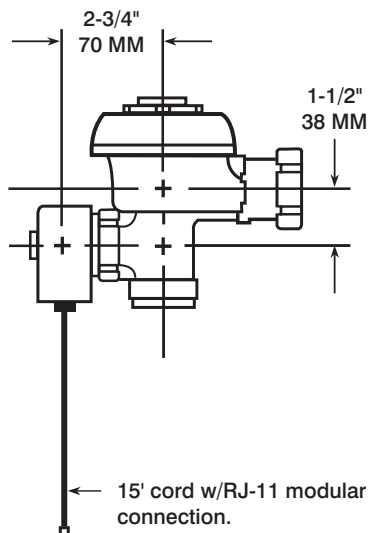

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.



**FWI**® **PROGRAMMED WATER  
TECHNOLOGIES**  
A SLOAN VALVE COMPANY