


# MICROPlumb® EL 3AACMOD PRODUCTS EL 3AALCMOD Electronic Retrofit Flushometer Body



- ▶ **Description**  
Concealed electronic operated water closet Flushometer body, for retrofit of handle-operated Flushometer.
- ▶ **Flush Cycle**
  - Model EL3AACMOD Water Saver (3.5 gpf/13.2 Lpf)
  - Model EL3AALCMOD Low Consumption (1.6 gpf/6.0 Lpf)
- ▶ **Specifications**
  - Concealed, electronic operated, diaphragm type, rough brass, closet Flushometer
  - 24 VAC 50/60 Hz non-hold-open integral solenoid operator
  - No external volume adjustment to ensure water conservation
  - 15' cord w/ RJ-11 connection
  - Dual filtered bypass diaphragm
  - Permex® rubber diaphragm
  - Adjustable tailpiece
- ▶ **Variation**
  - AG** Ground-joint tailpiece (to retrofit Delany and Sloan ground-joint stops)

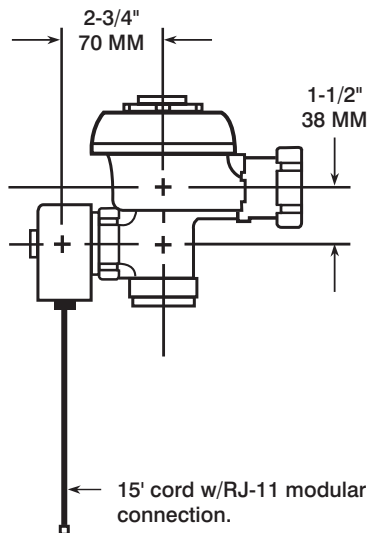

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.



**PWT**® **PROGRAMMED WATER TECHNOLOGIES**  
A SLOAN VALVE COMPANY