

# MICROPlumb® EL 3AACMODAG\* PRODUCTS EL 3AALCMODAG\* Electronic Retrofit Flushometer Body



## ► Description

Concealed electronic operated water closet Flushometer body, for retrofit of handle-operated Flushometer. Ground-joint tailpiece (to retrofit Delany and Sloan ground-joint stops).


## ► Flush Cycle

- Model EL3AACMOD Water Saver (3.5 gpf/13.2 Lpf)
- Model EL3AALCMOD Low Consumption (1.6 gpf/6.0 Lpf)

## ► Specifications

- Concealed, electronic operated, diaphragm type, rough brass, closet Flushometer
- 24 VAC 50/60 Hz non-hold-open integral solenoid operator
- No external volume adjustment to ensure water conservation
- 15' cord w/ RJ-11 connection
- Dual filtered bypass diaphragm
- Permex® rubber diaphragm
- Adjustable tailpiece

\*Required: H 130-A-1 RB ADJ/GJ Tail ASM 5" CL TO CL  
Specify length required.

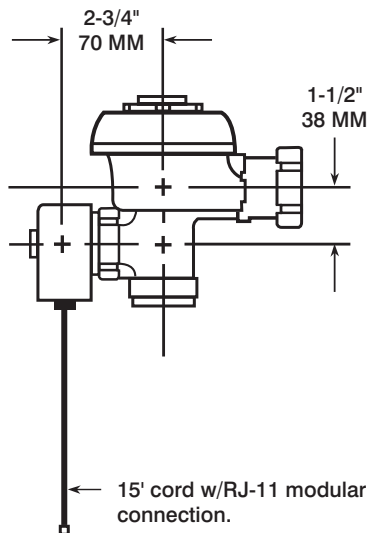

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.



**PWT**® PROGRAMMED WATER  
TECHNOLOGIES  
A SLOAN VALVE COMPANY