

MICROPlumb® PRODUCTS Wall Mount Shower Sensor

EL 462-A



► Description


Water-proof wall mounted infrared shower sensor with adjustable detection range and shower run time. For use with MICROPlumb® Shower Controller.

► Specifications

- Operates a single shower
- Brushed stainless steel housing
- Water-proof (NEMA 6) sensor module
- Detection range adjustable from 1" to 28"
- Optics horizontally aligned 15 degrees downward
- Run time adjustable from 1 minute 30 seconds to 2 hours 30 minutes $\pm 10\%$
- Visible LED target detection
- 24 VAC – 50/60 Hz operating voltage
- 27-1/2" (+/- 1/4") long cord w/6 position, 4 conductors, RJ-11 plug

► Accessories

- ETF 1003-72 6' Single Wire Extension Cord Kit
- ETF 1003-108 9' Single Wire Extension Cord Kit
- ETF 1003-240 20' Single Wire Extension Cord Kit

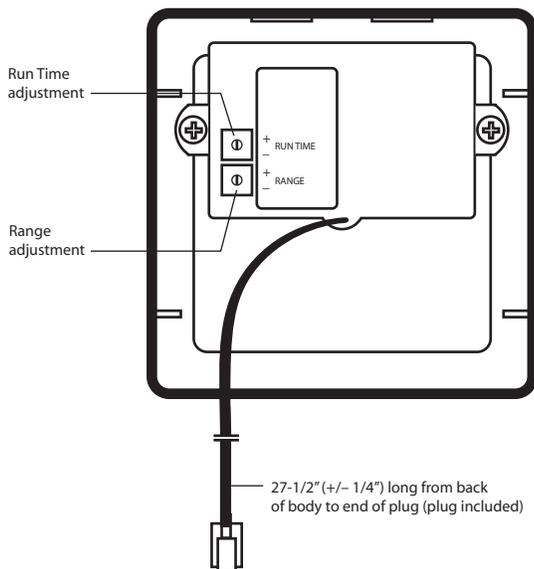

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

PWT® **PROGRAMMED WATER TECHNOLOGIES**
A SLOAN VALVE COMPANY