

**MICROPlumb®
PRODUCTS
Infrared Shower
Sensor Controller**

**ETF
492-A**




► **Description**


Electronic shower control used with the MICROPlumb® infrared sensor and solenoid to control a single shower.

► **Specifications**

- 24 VAC – 50/60 Hz operating voltage
- RJ-11 six position, four pin connections for sensor and solenoid
- Splash-proof enclosure w/mounting kit
- Can be remotely located 7 feet from infrared sensor (this distance can be increased up to a maximum of 35 feet with the addition of MICROPlumb® extension cord kits)

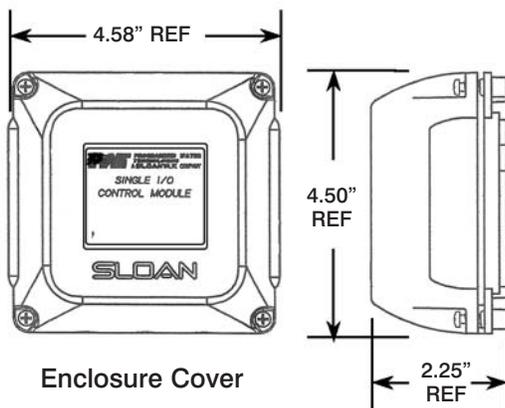

Enclosure Cover

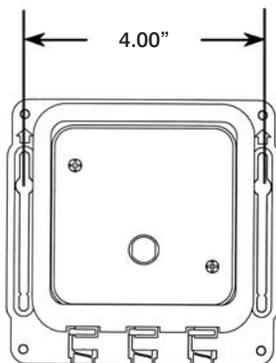

Enclosure Base

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.



10500 Seymour Avenue • Franklin Park, Illinois 60131-1259
Phone 800-671-6970 • Fax 847-671-6944