

# MICROPlumb® PRODUCTS Push Button

# MCR 183-A



## ► Description

Waterproof push button for use with any MICROPlumb® controller. Mounts on fixture back splashes, wall box covers or walls up to 2.5" thick. Activates water closets, lavatories and showers.

## ► Specifications

- 35 VDC Maximum
- 0.20 AMP Maximum
- Stainless steel button w/chrome plated brass flange
- 1.25" hole required
- 15' Cord w/6 position, 4 pin RJ-11 modular plug



## ► Variations

<input type="checkbox"/> -1	"A" = 1.28"	Less than 1" wall thickness
<input type="checkbox"/> -2	"A" = 2.28"	1" wall thickness
<input type="checkbox"/> -3	"A" = 3.28"	2.5" wall thickness

## ► Accessories

- ETF 1003-72 6' Single wire extension Cord Kit
- ETF 1003-108 9' Single wire extension Cord Kit
- ETF 1003-240 20' Single wire extension Cord Kit
- MCR 41-A 20' Three wire extension Cord Kit
- MCR 42-A 20' Four wire harness extension Cord Kit

NOTE: The MCR 183-A push button cord can be extended to an overall maximum length of 200' (with the purchase of MICROPlumb® extension cord kit for push buttons and solenoids).

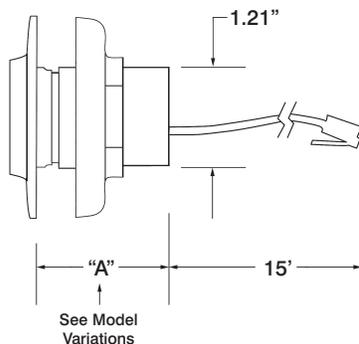

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

**FWI**® **PROGRAMMED WATER TECHNOLOGIES**  
A SLOAN VALVE COMPANY

10500 Seymour Avenue • Franklin Park, Illinois 60131-1259  
Phone 800-671-6970 • Fax 847-671-6944