

# MICROPlumb® PRODUCTS Push Button

# MCR 184-A



## ► Description

Waterproof, thru-wall push button for use with any MICROPlumb® controller. Activates water closets, lavatories and showers.

## ► Specifications

- 35 VDC Maximum
- 0.20 AMP Maximum
- Stainless steel button w/chrome plated brass flange
- 1.25" hole required
- 15' Cord w/6 position, 4 pin RJ-11 modular plug

## ► Variations



|                             |              |                    |
|-----------------------------|--------------|--------------------|
| <input type="checkbox"/> -5 | "A" = 7.28"  | 6" wall thickness  |
| <input type="checkbox"/> -7 | "A" = 9.28"  | 8" wall thickness  |
| <input type="checkbox"/> -9 | "A" = 11.28" | 10" wall thickness |

Consult factory for additional push button variations.

## ► Accessories

- ETF 1003-72 6' Single wire extension Cord Kit
- ETF 1003-108 9' Single wire extension Cord Kit
- ETF 1003-240 20' Single wire extension Cord Kit
- MCR 41-A 20' Three wire extension Cord Kit
- MCR 42-A 20' Four wire harness extension Cord Kit

NOTE: The MCR 184-A push button cord can be extended to an overall maximum length of 200' (with the purchase of MICROPlumb® extension cord kit for push buttons and solenoids).

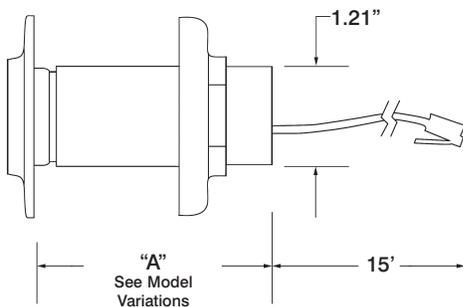

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

**FWT**® **PROGRAMMED WATER TECHNOLOGIES**  
A SLOAN VALVE COMPANY

10500 Seymour Avenue • Franklin Park, Illinois 60131-1259  
Phone 800-671-6970 • Fax 847-671-6944