

# MICROPlumb® PRODUCTS Lavatory/Shower Solenoid Retrofit Kit

# MCR 194-A



## ► Description

24 VAC retrofit solenoid kit. Converts Acorn, Bradley, Metcraft and Willoughby air valve manifolds from pneumatic operation to electronic operation. Used in conjunction with MICROPlumb® controllers to provide control over lavatory and shower water usage.


## ► Specifications

- 24 VAC – 60 Hz operating voltage
- Current: In Rush: 13 VA  
Holding: 9 VA
- 160° F maximum water temperature
- Pilot operated
- Includes 15' cord w/6 position, 4 pin RJ-11 connection

## ► Accessories

- ETF 1003-240 20' Single Wire Extension Cord Kit

NOTE: Solenoid cable length can be increased to a maximum overall length of 200 feet using MICROPlumb® extension cords.

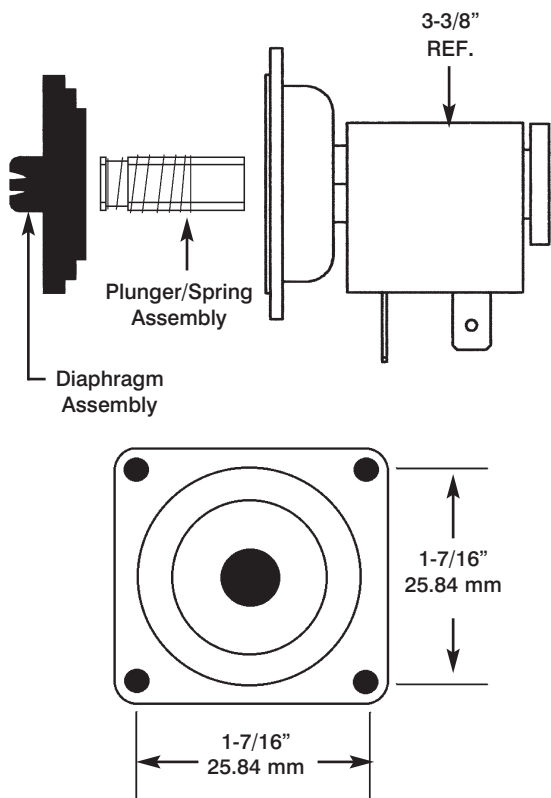

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.



10500 Seymour Avenue • Franklin Park, Illinois 60131-1259  
Phone 800-671-6970 • Fax 847-671-6944