

# MICROPlumb® PRODUCTS Push Button Assembly

# MCR 60-A



► **Description**  
Thru-wall push button for use with any MICROPlumb® controller. Activates water closets, lavatories and showers.

- **Specifications**
- 10 WATT Maximum
  - 48 VDC Maximum
  - 0.30 AMO Maximum (Resistive Load)
  - 0.15 AMP Maximum (Inductive Load)

► **Variations**



<input type="checkbox"/> -1	"A" = 2.45" REF Less than 1" wall thickness
<input type="checkbox"/> -1	"A" = 4.45" REF 1" wall thickness
<input type="checkbox"/> -6	"A" = 9.45" REF 6" wall thickness
<input type="checkbox"/> -8	"A" = 11.45" REF 8" wall thickness
<input type="checkbox"/> -10	"A" = 13.45" REF 10" wall thickness

Consult factory for additional push button variations.

► **Accessories**

- ETF 1003-72 6' Single wire extension Cord Kit
- ETF 1003-108 9' Single wire extension Cord Kit
- ETF 1003-240 20' Single wire extension Cord Kit
- MCR 41-A 20' Three wire extension Cord Kit
- MCR 42-A 20' Four wire harness extension Cord Kit

NOTE: The MCR 60-A push button cord can be extended to an overall maximum length of 200' (with the purchase of MICROPlumb® extension cord kit for push buttons and solenoids).

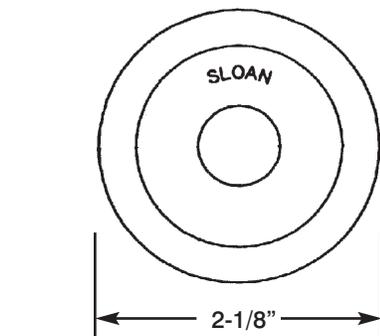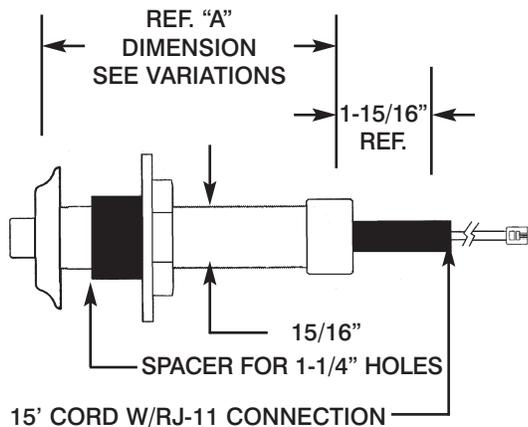

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.



10500 Seymour Avenue • Franklin Park, Illinois 60131-1259  
Phone 800-671-6970 • Fax 847-671-6944